

Safety Precautions

Prior to utilizing the product, it is essential to thoroughly review this user manual and retain it in a secure location for subsequent reference.

⚠ Danger

Please do not allow this product to contact water directly. Be cautious to use the stand in damp conditions or inclement weather.



⚠ Warnings

- To prevent the bracket from tilting or incurring damage, it is imperative to avoid its placement in unstable locations.
- Covering the bracket with materials such as cloth or paper should be avoided, as this poses a risk of fire.
- Forceful bending or pulling of the power cord is discouraged, as compromised cords could lead to fire or electric shock incidents.
- Arbitrary modifications or replacement of the bracket's components are not recommended, as these actions could lead to electric shock, fire, or other unintended consequences.
- The insertion of metal objects or flammable materials into the bracket's crevices is strongly advised against to prevent risks of fire or electric shock.
- It is advisable to avoid situating the bracket near flammable materials that could be affected by wind, thereby mitigating fire hazards.
- Ensuring the bracket is positioned on a level surface is crucial to avoid its tilting or potential damage.
- In the event of damage to the bracket's external cable or cord, replacement should be conducted by the manufacturer or a qualified technician to circumvent hazards.
- Should any irregularities be observed, immediate disconnection of the power supply is recommended for a thorough inspection, and contacting the dealer for assistance is advised.


⚠ Cautions

- Prior to utilization, it is crucial to remove all packaging attachments from the product.
- Ensure that the bracket is devoid of any packaging attachments and adhesives before operation to mitigate the risk of fire hazards.
- This bracket features a basic waterproof design; however, improper usage may compromise insulation and lead to electric shock.
- To avert fire risks, maintain a safe distance between the lamp and any flammable materials.
- Avoid disconnecting the power cord with damp hands to prevent the occurrence of electric shock incidents.
- In instances where the bracket will not be in use for an extended period, it is advisable to disconnect the control device from the electrical socket to prevent potential fire hazards.



Scan the QR code to watch the tutorial

meking®

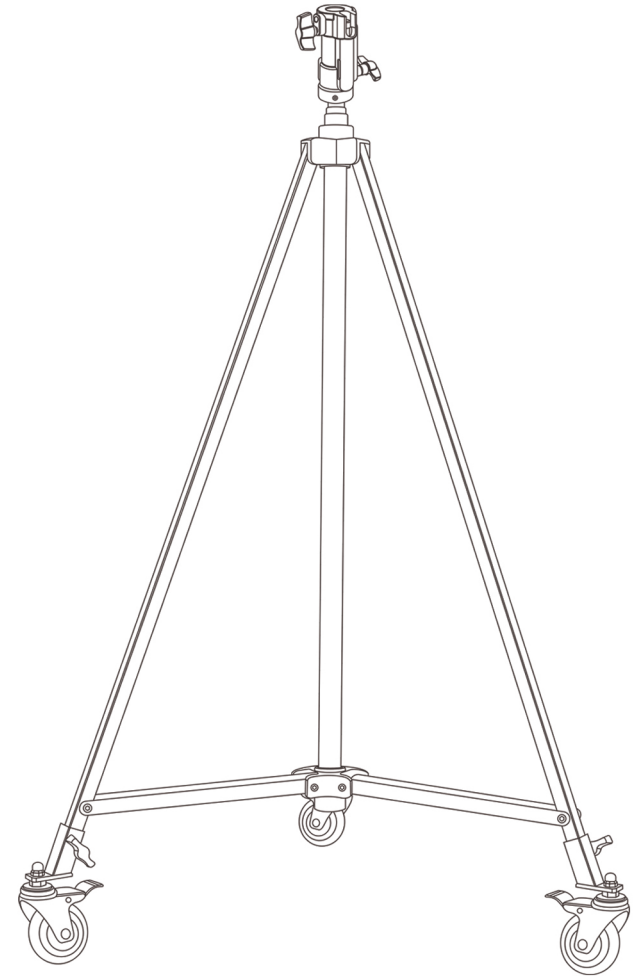

Motorized Light-stand

The Seeker: DK-4030F
Meking Professional Light Stand
User Manual

Manufacturer: Yuyao Meking Film and Television
Equipment Co., Ltd.


Service Hotline: 0574-62198060

Brand Official Website: www.mekingphoto.com

Product Introduction

Thank you for choosing the Meking DK-4030F Motorized Light-stand, made of aluminum alloy, designed for hands-free operation.


Product Description

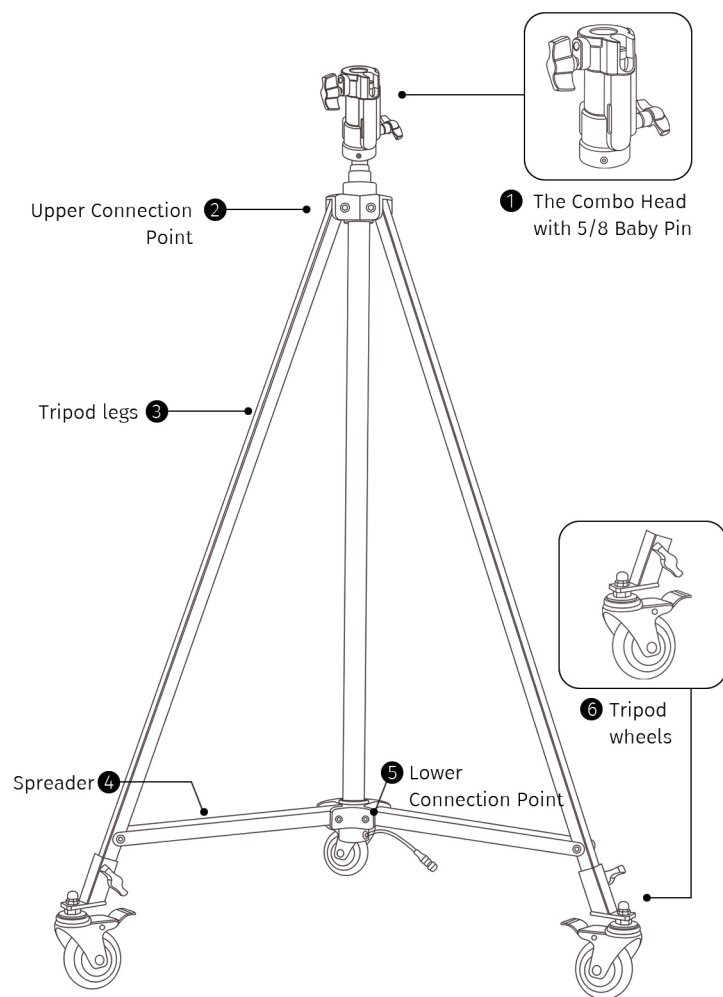

Product Specifications

Minimum height	1 565 m m	Diameter	28 35 40
Maximum height	2 910 m m	Tripod legs	25 * 25
Collapsed height	1 580 m m	Load capacity	15 k g
Net weight	15.05 k g	Footprint	1020 m m
Sections	3	Packaging	1 p c s

Applications

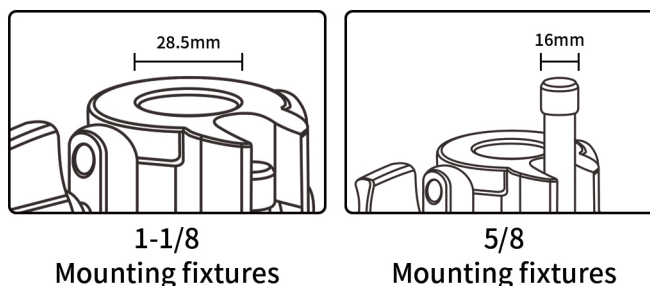


⚠ Cautions

- The bracket should never remain connected to the power supply when not in use.
- It is imperative to turn off the power and disconnect the bracket after each usage.
- While this product is designed to be waterproof, it is not advisable to use it outdoors under conditions of extreme moisture or rain for extended durations.
- Adherence to the following steps is essential for proper use.

- ① Attach the power adapter cable to the bracket cable securely.
- ② Insert the power plug into an appropriate power outlet.
- ③ The green light shows the operable state. If it is red light, double check the cable and the power, or if the weight load is over capacity.
*Prior to operation, initiate calibration by pressing the down button once.
- ④ Subsequent to calibration, press the bracket button once to engage the automatic adjustment feature, allowing the bracket to move upward or downward. Once the bracket attains the desired height, press the middle pause button to halt the adjustment.

- ⑤ To reset the bracket post-use, press the down button, wait for the stand to move downward to initial height.
- ⑥ Remember to disconnect the power plug from the outlet.

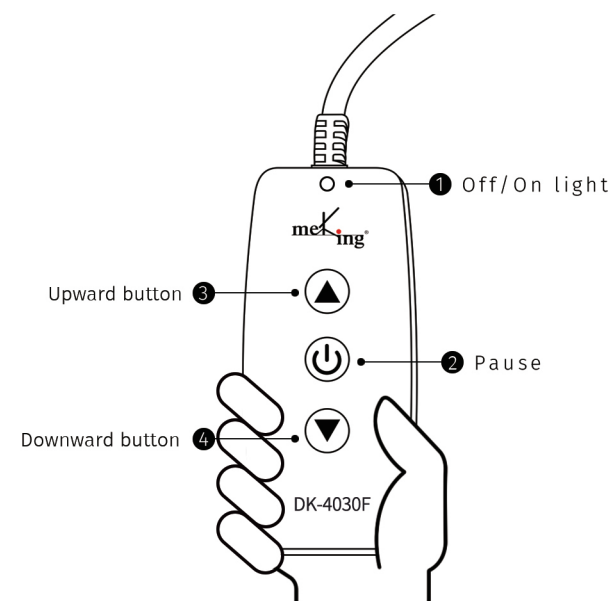

(Proper use direction of the remote controller)

Fault Resolution

If there is an issue with the product and it cannot be resolved using the following information, please contact Meking store customer service or the service hotline.

Should the product be non-operational:

It is possible that a power outage has occurred or the socket is devoid of power. Verify the functionality of alternative power sources. If operational, assess the socket's condition by connecting a different device.

Examine the product's power cord for any damage. In the event of damage to the power cord, it is imperative that it be replaced by personnel specialized from Meking to eliminate any potential risks.